


## GJXFH Flat FTTH Drop Cable

Cable structure:

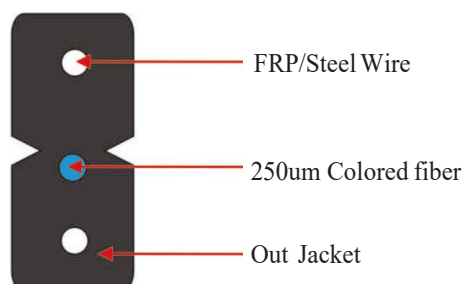

### Description:

FTTH indoor cable has a much greater bandwidth to carry data and less susceptible to interference than common indoor fiber cables. and it's ideal for indoor cabling, end users directly cabling, and access network.

### Features:

- Same function of the common indoor fiber cables.
- Small diameter and light weight, water-resistant, soft and bendable, easy to deploy and maintenance.

### Application:

- Local Area Network (LAN).
- Used end users directly cabling.
- FTTH (fiber to the home) indoor cabling and distribution (video, audio and data signals)

### Technical parameters

Cable type	OD (mm)	Nominal Weight (kg/km)	Tensile Strength (N)		Crush Resistance (N/100MM)		Bending Radius (mm)	
			Short-term	Long-term	Short-term	Long-term	Dynamic	Static
GJXFH-1Xn	(2.0±0.1)*(3.0±0.1)	7.5	200	100	1000	500	20D	15D
GJXFH-2Xn	(2.0±0.1)*(3.0±0.1)	7.5	200	100	1000	500	20D	15D
GJXFH-3Xn	(2.0±0.1)*(3.0±0.1)	7.5	200	100	1000	500	20D	15D
GJXFH-4Xn	(2.0±0.1)*(3.0±0.1)	7.5	200	100	1000	500	20D	15D
Storage/Working temperature (°C)			-20-+60					

Note: Xn is fiber optic model and D is the diameter of optical cable.

### Packing and Reel Length

- \*.Standard wooden drum with protection.
- \*.Standard reel length:2/3 km/reel.other length is also available.